

FGU-300

GROUND LOADING UNIT(TOP-LOAD)

FGU-300 ►►►



FEATURES

Type


- Earth Ground Verification
- Civacon Earth Clamp
- Oil resist 30 feet coiled cable.
- Red – NO Ground
- Green – Ground
- Interlock out put to BCU

SPECIFICATIONS

- Operating Temperature -30°C ~70°C
- Power : 120VAC 60Hz
- Output : Relay Contacts-5A
- Enclosures : NEMA IP 65
- Housing Mat'l : Aluminium(C4)
- Hub connection : 1" X 2
- Ex IIB T6 (explosion-proof enclosure)

Wiring

FGU 300 Wiring

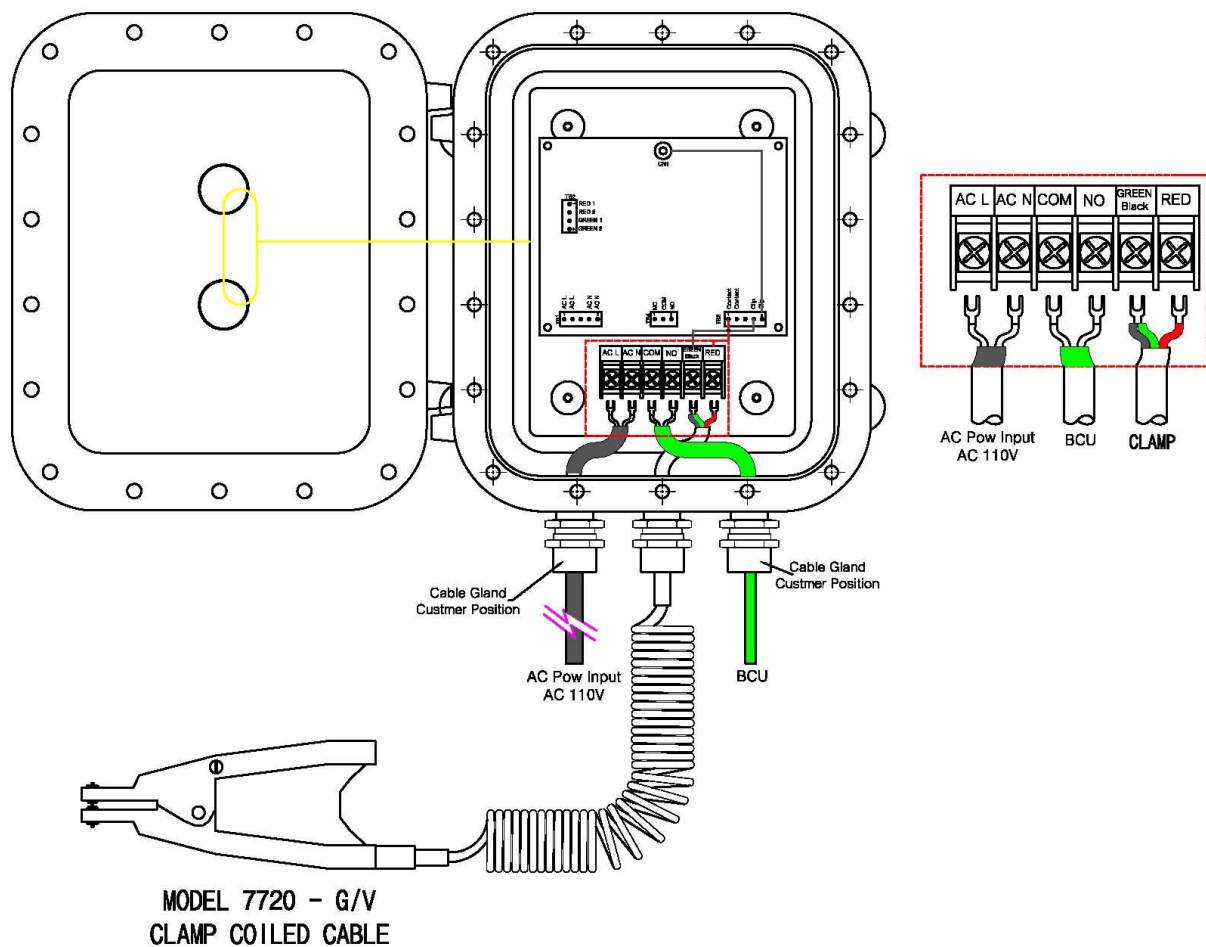

FGU MOUNTING DIAGRAM

Installation


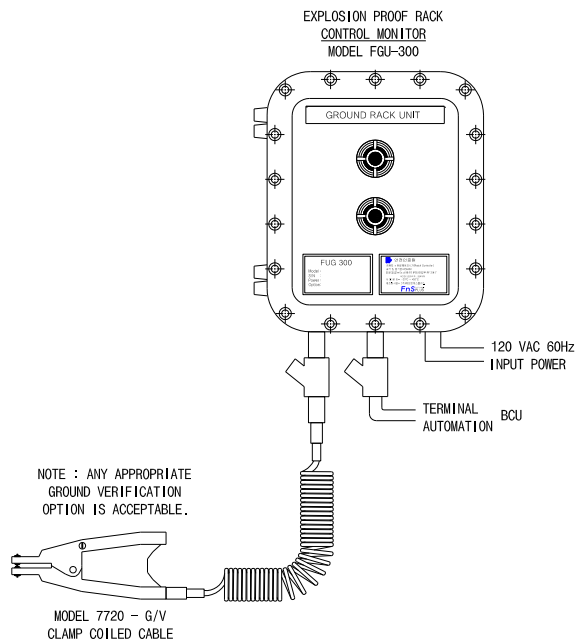


FIGURE 1 - TOP LOADING INSTALLATION

DIMENSION

Size

300(W) * 250(H) * 200(D) mm

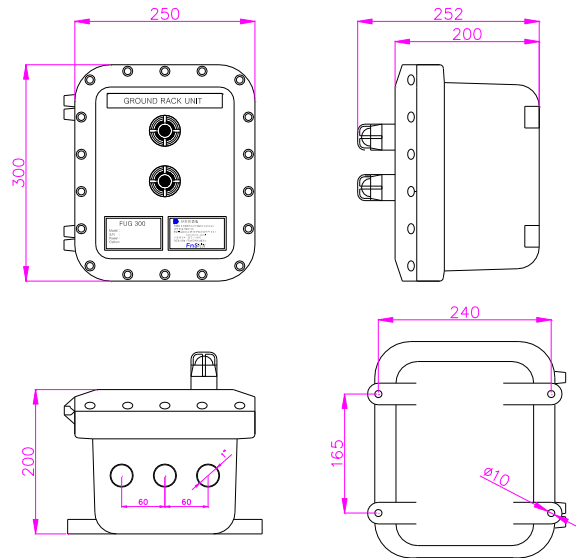

ODER INFORMATION

MODEL	ODER CODE	DESCRIPTION
FGU 300	1A	7720 CLAMP + AC POWER 110V
	1E	7720 CLAMP + AC POWER 220V